Hierarchical Routing

Our routing study thus far - idealization
- all routers identical
- network "flat"
- … *not* true in practice

scale: with 50 million destinations:
- can't store all dest's in routing tables!
- routing table exchange would swamp links!


administrative autonomy
- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical Routing

- Route to networks, not hosts
- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol


gateway routers
- special routers in AS
- run intra-AS routing protocol with all other routers in AS
- *also* responsible for routing to destinations outside AS
  - run *inter-AS routing* protocol with other gateway routers

Intra-AS and Inter-AS routing

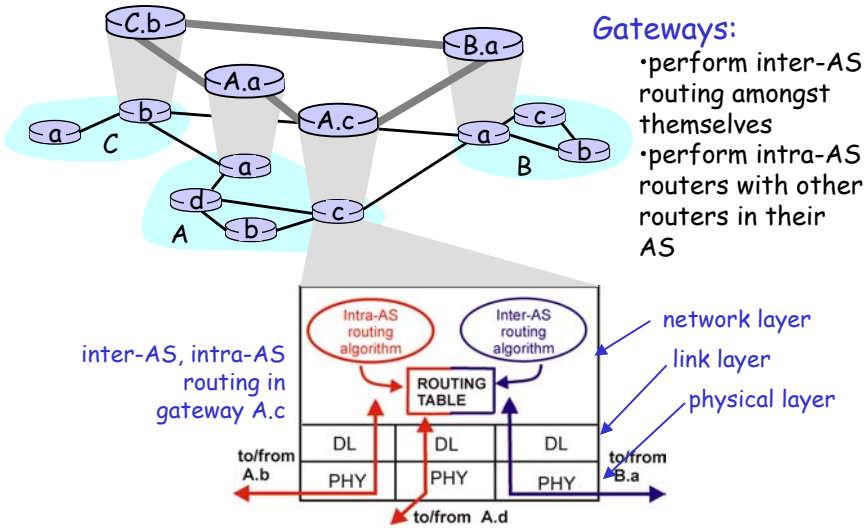

Gateways:
- perform inter-AS routing amongst themselves
- perform intra-AS routers with other routers in their AS


Intra-AS and Inter-AS routing

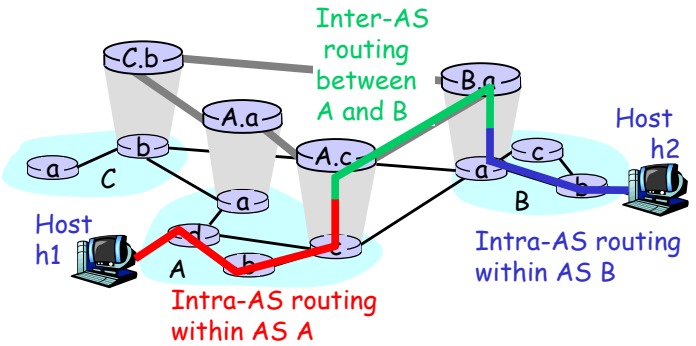

- We'll examine specific inter-AS and intra-AS Internet routing protocols shortly

IP Addressing: introduction

- IP address: 32-bit identifier for host, router *interface*
- *interface:* connection between host, router and physical link
  - router's typically have multiple interfaces
  - host may have multiple interfaces
  - IP addresses associated with interface, not host, router

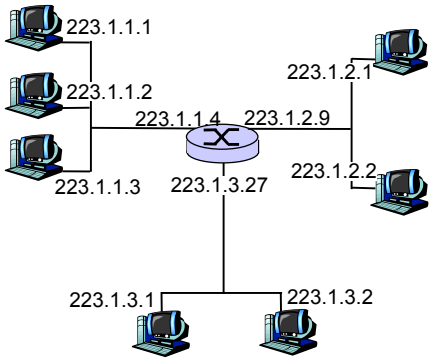


223.1.1.1 = 11011111 00000001 00000001 00000001

223 1 1 1

IP Addressing

- IP address:
  - network part (high order bits)
  - host part (low order bits)
- *What's a network ?* (from IP address perspective)
  - device interfaces with same network part of IP address
  - can physically reach each other without intervening router

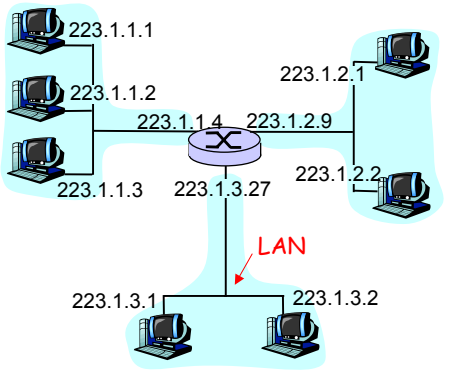


network consisting of 3 IP networks (for IP addresses starting with 223, first 24 bits are network address)

IP Addressing

How to find the networks?

- Detach each interface from router, host
- create "islands of isolated networks

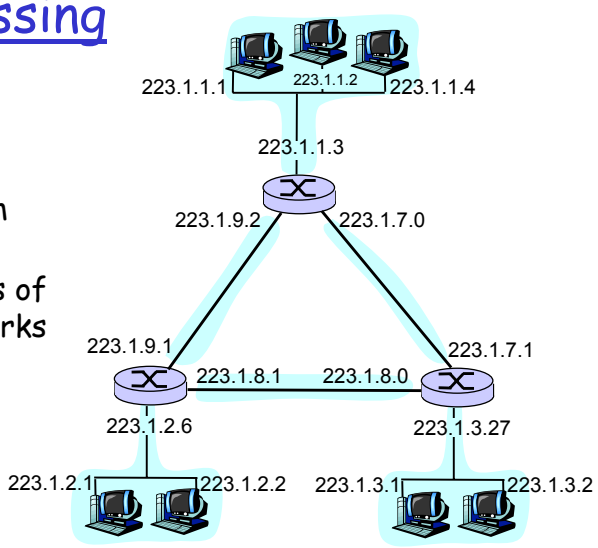


Interconnected system consisting of six networks

IP Addresses


given notion of "network", let's re-examine IP addresses:

"class-full" addressing:

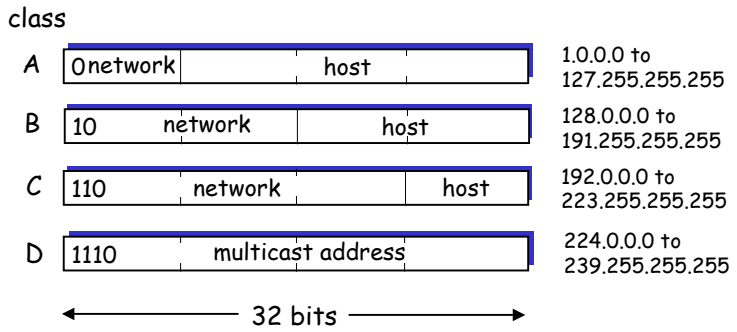

IP addressing: CIDR

- classful addressing:
  - inefficient use of address space, address space exhaustion
  - e.g., class B net allocated enough addresses for 65K hosts, even if only 2K hosts in that network
- CIDR: Classless InterDomain Routing
  - network portion of address of arbitrary length
  - address format: a.b.c.d/x, where x is # bits in network portion of address

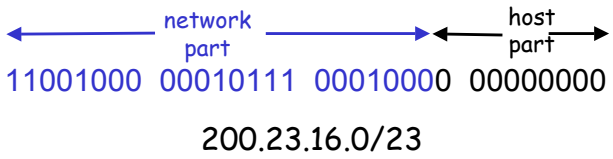

IP addresses: how to get one?

Hosts (host portion):

- hard-coded by system admin in a file
- DHCP: Dynamic Host Configuration Protocol: dynamically get address: "plug-and-play"
  - host broadcasts "DHCP discover" msg
  - DHCP server responds with "DHCP offer" msg
  - host requests IP address: "DHCP request" msg
  - DHCP server sends address: "DHCP ack" msg

IP addresses: how to get one?


Network (network portion):

- get allocated portion of ISP's address space:

ISP's block	11001000 00010111 00010000 00000000	200.23.16.0/20
Organization 0	11001000 00010111 00010000 00000000	200.23.16.0/23
Organization 1	11001000 00010111 00010010 00000000	200.23.18.0/23
Organization 2	11001000 00010111 00010100 00000000	200.23.20.0/23
...	....	....
Organization 7	11001000 00010111 00011110 00000000	200.23.30.0/23


Hierarchical addressing: route aggregation

Hierarchical addressing allows efficient advertisement of routing information:

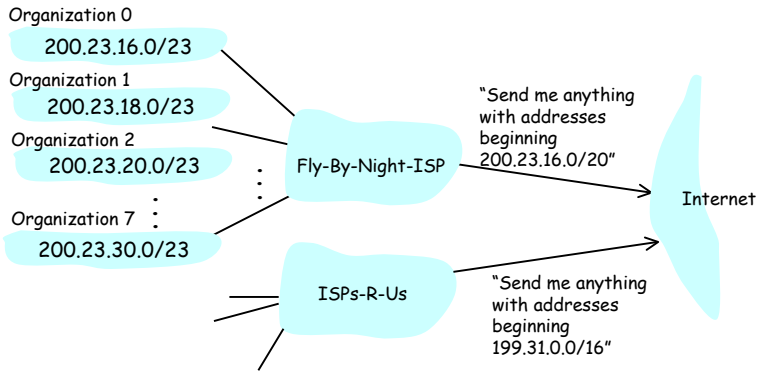

Hierarchical addressing: more specific routes

ISPs-R-Us has a more specific route to Organization 1

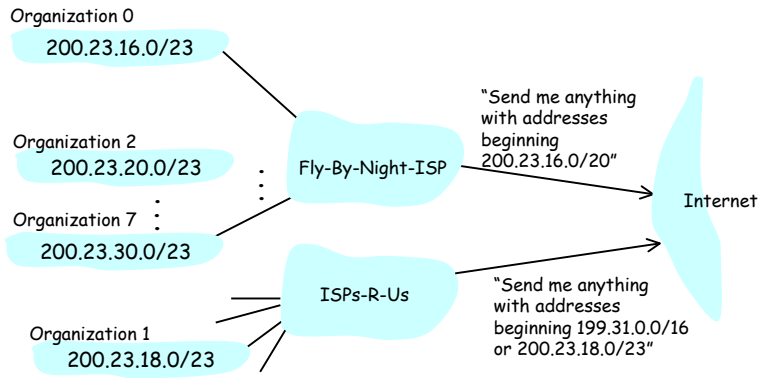

IP addressing: the last word...

Q: How does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes

Getting a datagram from source to dest.


IP datagram:

misc fields	source IP addr	dest IP addr	data

- datagram remains unchanged, as it travels source to destination
- addr fields of interest here

routing table in A

Dest. Net.	next router	Nhops
223.1.1		1
223.1.2	223.1.1.4	2
223.1.3	223.1.1.4	2

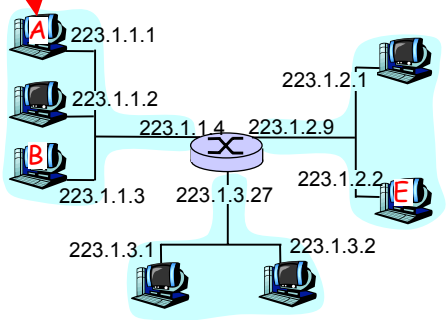


Getting a datagram from source to dest.

misc fields	223.1.1.1	223.1.1.3	data

Starting at A, given IP datagram addressed to B:

- look up net. address of B
- find B is on same net. as A
- link layer will send datagram directly to B inside link-layer frame
  - B and A are directly connected

Dest. Net.	next router	Nhops
223.1.1		1
223.1.2	223.1.1.4	2
223.1.3	223.1.1.4	2

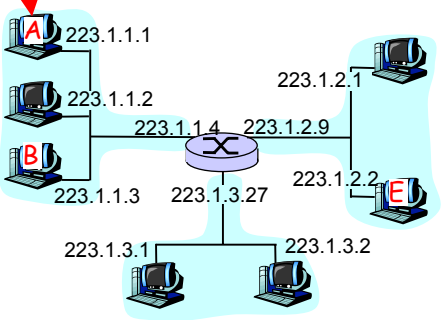


Getting a datagram from source to dest.

misc fields	223.1.1.1	223.1.2.3	data

Starting at A, dest. E:

- look up network address of E
- E on *different* network
  - A, E not directly attached
- routing table: next hop router to E is 223.1.1.4
- link layer sends datagram to router 223.1.1.4 inside link-layer frame
- datagram arrives at 223.1.1.4
- continued.....

Dest. Net.	next router	Nhops
223.1.1		1
223.1.2	223.1.1.4	2
223.1.3	223.1.1.4	2

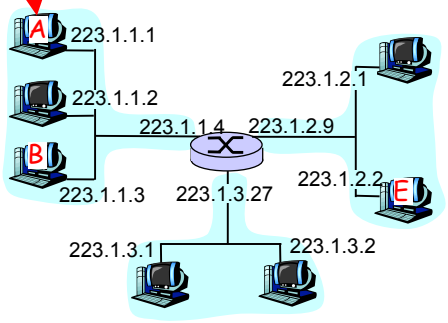

Getting a datagram from source to dest.

misc fields	223.1.1.1	223.1.2.3	data

Arriving at 223.1.4, destined for 223.1.2.2

- look up network address of E
- E on *same* network as router's interface 223.1.2.9
  - router, E directly attached
- link layer sends datagram to 223.1.2.2 inside link-layer frame via interface 223.1.2.9
- datagram arrives at 223.1.2.2!!! (hooray!)

Dest. network	next router	Nhops	interface
223.1.1	-	1	223.1.1.4
223.1.2	-	1	223.1.2.9
223.1.3	-	1	223.1.3.27

