Summary of MAC protocols

- What do you do with a shared media?
  - Channel Partitioning, by time, frequency or code
    - Time Division,Code Division, Frequency Division
  - Random partitioning (dynamic),
    - ALOHA, S-ALOHA, CSMA, CSMA/CD
    - carrier sensing: easy in some technoligies (wire), hard in others (wireless)
    - CSMA/CD used in Ethernet
  - Taking Turns
    - polling from a central cite, token passing


LAN technologies

Data link layer so far:

- services, error detection/correction, multiple access

Next: LAN technologies

- addressing
- Ethernet
- hubs, bridges, switches
- 802.11
- PPP
- ATM

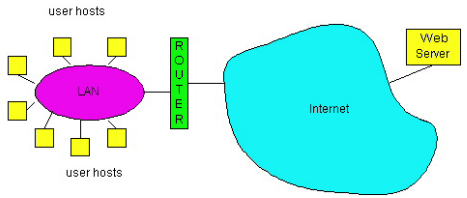

LAN Addresses and ARP

32-bit IP address:


- *network-layer* address
- used to get datagram to destination network (recall IP network definition)

LAN (or MAC or physical) address:

- used to get datagram from one interface to another physically-connected interface (same network)
- 48 bit MAC address (for most LANs) burned in the adapter ROM

LAN Addresses and ARP

Each adapter on LAN has unique LAN address

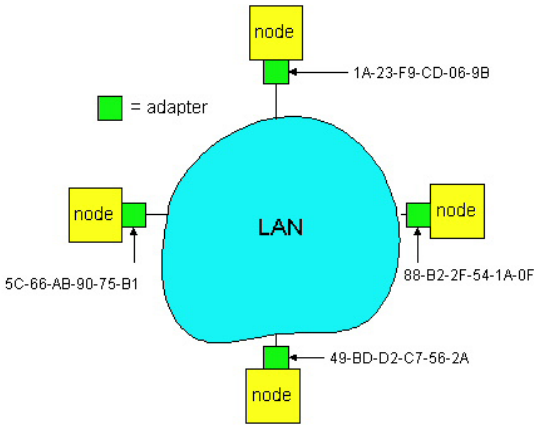


LAN Address (more)


- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- Analogy:
  - (a) MAC address: like Social Security Number
  - (b) IP address: like postal address
- MAC flat address => portability
  - can move LAN card from one LAN to another
- IP hierarchical address NOT portable
  - depends on network to which one attaches

Recall earlier routing discussion

Starting at A, given IP datagram addressed to B:


- look up net. address of B, find B on same net. as A
- link layer send datagram to B inside link-layer frame

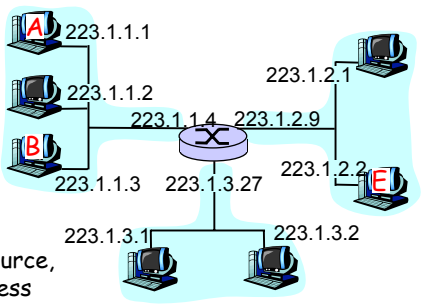

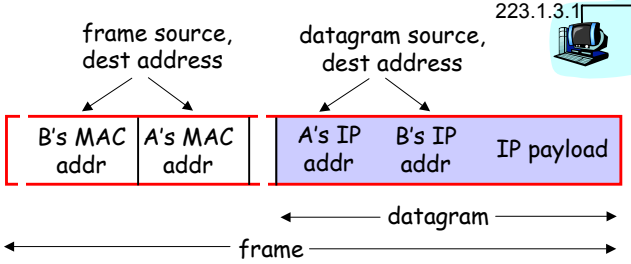

ARP: Address Resolution Protocol

Question: how to determine MAC address of B given B's IP address?

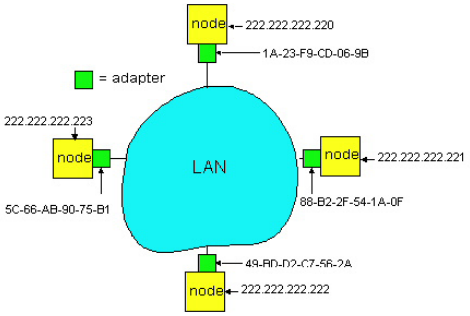

- Each IP node (Host, Router) on LAN has ARP module, table
- ARP Table: IP/MAC address mappings for some LAN nodes

  < IP address; MAC address; TTL>


  < ..... >
  - TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

ARP protocol

- A knows B's IP address, wants to learn physical address of B
- A broadcasts ARP query pkt, containing B's IP address
  - all machines on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) physical layer address
- A caches (saves) IP-to-physical address pairs until information becomes old (times out)
  - soft state: information that times out (goes away) unless refreshed

Routing to another LAN

walkthrough: routing from A to B via R

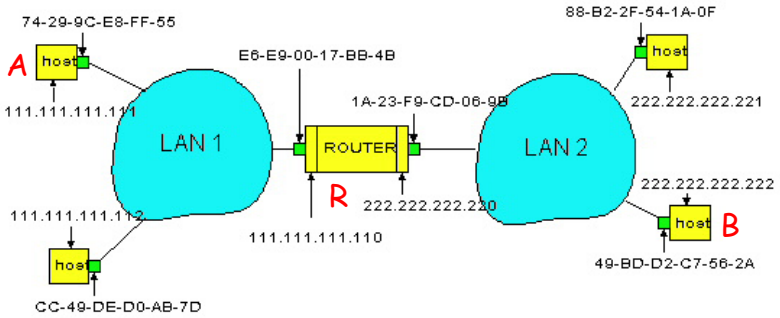

- A creates IP packet with source A, destination B
- A uses ARP to get R's physical layer address for 111.111.111.110
- A creates Ethernet frame with R's physical address as dest, Ethernet frame contains A-to-B IP datagram
- A's data link layer sends Ethernet frame
- R's data link layer receives Ethernet frame
- R removes IP datagram from Ethernet frame, sees its destined to B
- R uses ARP to get B's physical layer address
- R creates frame containing A-to-B IP datagram sends to B

